


Tylaska
MARINE HARDWARE


T16 Snap Shackle

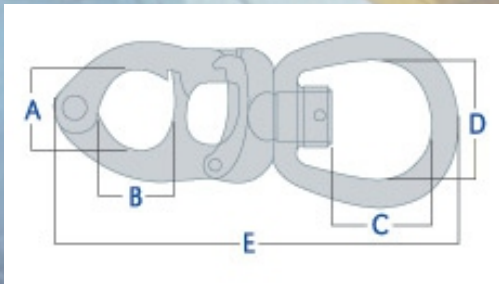

Shackle Type	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	Thickness in (mm)	Weight oz (gm)	Work Load lb (kg)	Breaking Strength lb (kg)	Recommended applications
T16 SB	29/32 (23.0)	7/8 (22.2)	25/32 (19.8)	27/32 (21.4)	4 3/4 (120.6)	0.53 (13.5)	9.0 (255)	8,000 (3628)	16,000 (7257)	40' - 50' Boats
T16 LB	29/32 (23.0)	7/8 (22.2)	1 9/32 (32.5)	1 13/32 (35.7)	5 3/8 (136.5)	0.53 (13.5)	12.5 (354)	8,000 (3628)	16,000 (7257)	40' - 50' Boats

Tylaska
MARINE HARDWARE

T16 Snap Shackle

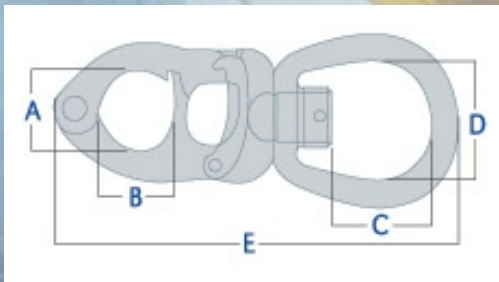

Shackle Type	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	Thickness in (mm)	Weight oz (gm)	Work Load lb (kg)	Breaking Strength lb (kg)	Recommended applications
T16 SB	29/32 (23.0)	7/8 (22.2)	25/32 (19.8)	27/32 (21.4)	4 3/4 (120.6)	0.53 (13.5)	9.0 (255)	8,000 (3628)	16,000 (7257)	40' - 50' Boats
T16 LB	29/32 (23.0)	7/8 (22.2)	1 9/32 (32.5)	1 13/32 (35.7)	5 3/8 (136.5)	0.53 (13.5)	12.5 (354)	8,000 (3628)	16,000 (7257)	40' - 50' Boats